



HUAKE TESTING

FCC TEST REPORT

Prepared for :

EDA Technology Shanghai Co., Ltd.

Building 29, No.1661 Jialuo Road, Jiading District, Shanghai, PRC

Product Name: ED-IPC2000

Trade Mark: EDA

Product Model (S): ED-IPC2010, ED-IPC2020

Date of Test: Dec. 07, 2023 – Dec. 18, 2023

Date of Report: Dec. 18, 2023

Report Number: HK2312075950-1ER

Prepared By :

Shenzhen HUAKE Testing Technology Co., Ltd.

**1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China**

TEL: +86-755-2302 9901 FAX: +86-755-2302 9901

E-mail: service@cer-mark.com <http://www.cer-mark.com>

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



TEST REPORT VERIFICATION

Applicant : EDA Technology Shanghai Co., Ltd.
Address : Building 29, No.1661 Jialuo Road, Jiading District, Shanghai, PRC
Manufacturer : EDA Technology Shanghai Co., Ltd.
Address : Building 29, No.1661 Jialuo Road, Jiading District, Shanghai, PRC
Product Name : ED-IPC2000
(A) Product Model : ED-IPC2010
(B) Series Model : ED-IPC2020
(C) Power Supply : Input: 9-28VDC, 24W

Standards FCC Part 15 Subpart B
ANSI C63.4:2019

This device described above has been tested by HUAKE, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of HUAKE, this document may be altered or revised by HUAKE, personal only, and shall be noted in the revision of the document.

Test Result..... **Pass**

Date of Test: Dec. 07, 2023 – Dec. 18, 2023

Prepared by: Kevin Pan
Project Engineer

Reviewed by: Silver Wm
Project Supervisor

Approved by: Jason Zhu
Technical Director



Table of Contents	Page
1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3 . EMC EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT	12
3.1.1 POWER LINE CONDUCTED EMISSION	12
3.1.2 TEST PROCEDURE	13
3.1.3 TEST SETUP	13
3.1.4 EUT OPERATING CONDITIONS	13
3.1.5 TEST RESULTS	14
3.2 RADIATED EMISSION MEASUREMENT	16
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	16
3.2.2 TEST PROCEDURE	16
3.2.3 TEST SETUP	17
3.2.4 EUT OPERATING CONDITIONS	17
3.2.5 TEST RESULTS	18
3.2.6 TEST RESULTS(Above 1GHz)	20
4 . EUT TEST PHOTO	22
ATTACHMENT PHOTOGRAPHS OF EUT	23



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	2023/12/18	Jason Zhou



1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part 15 Subpart B ANSI C63.4:2019	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report

(2) For client's request and manual description, the test will not be executed.



1.1 TEST FACILITY

Shenzhen HUAKE Testing Technology Co., Ltd.

Add. : 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Measurement Frequency Range	Uncertainty	NOTE
150 KHz ~ 30MHz	$\pm 2.71\text{dB}$	

B. Radiated Measurement :

Measurement Frequency Range	Uncertainty	NOTE
30MHz ~ 1000MHz	$\pm 3.90\text{dB}$	
1GHz ~6GHz	$\pm 4.28\text{dB}$	



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name	ED-IPC2000	
Product Model	ED-IPC2010	
Series Model	ED-IPC2020	
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: ED-IPC2010.	
Product Description	The EUT is a ED-IPC2000.	
	Operating frequency:	N/A
	Connecting I/O port:	N/A
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Power Source	DC Voltage	
Power Rating	Input: 9-28VDC, 24W	



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Working


For Conducted Test	
Final Test Mode	Description
Mode 1	Working

For Radiated Test	
Final Test Mode	Description
Mode 1	Working



2.3 DESCRIPTION OF TEST SETUP

Mode 1:

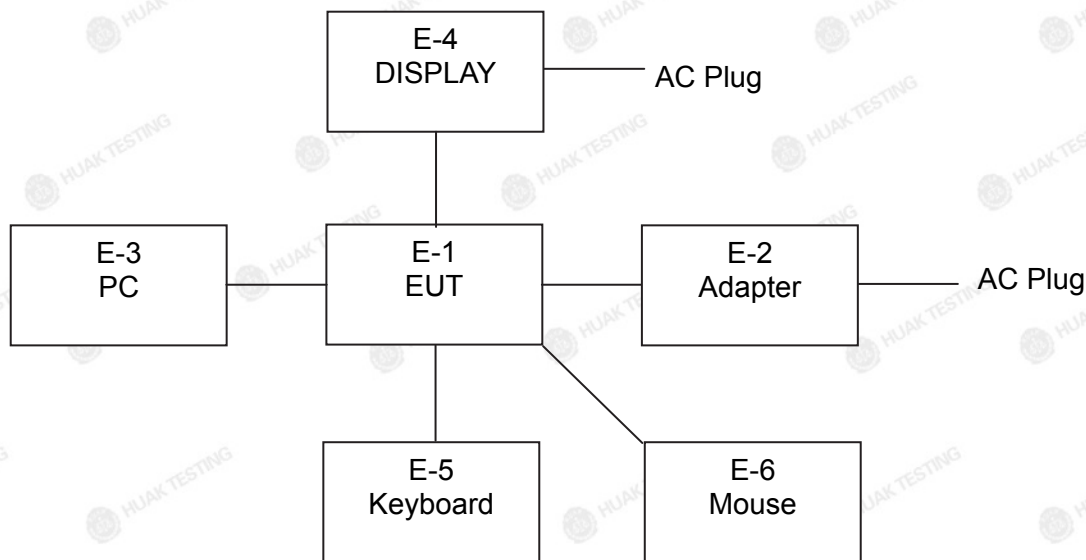



2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Trade Mark	Model/Type No.	Series No.	Note
E-1	ED-IPC2000		ED-IPC2010	N/A	EUT
E-2	Adapter	N/A	KSASB0241200200 D5	N/A	
E-3	PC	Lenovo	ThinkpadE450	N/A	
E-4	DISPLAY	AOC	280LM00004	N/A	
E-5	Keyboard	N/A	N/A	N/A	
E-6	Mouse	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

**2.5 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Feb. 17, 2023	1 Year
2.	Receiver	R&S	ESR-7	HKE-010	Feb. 17, 2023	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Feb. 17, 2023	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Feb. 17, 2023	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Feb. 17, 2023	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR-7	HKE-010	Feb. 17, 2023	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Feb. 17, 2023	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Feb. 17, 2023	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Feb. 17, 2023	1 Year
11.	Pre-amplifier	Schwarzbeck	EMC05184 5SE	HKE-015	Feb. 17, 2023	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Feb. 17, 2023	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Feb. 17, 2023	1 Year
14.	Power Sensor	Agilent	E9300A	HKE-086	Feb. 17, 2023	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Feb. 17, 2023	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Feb. 17, 2023	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Feb. 17, 2023	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Feb. 17, 2023	1 Year



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.1.2 TEST PROCEDURE

- The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

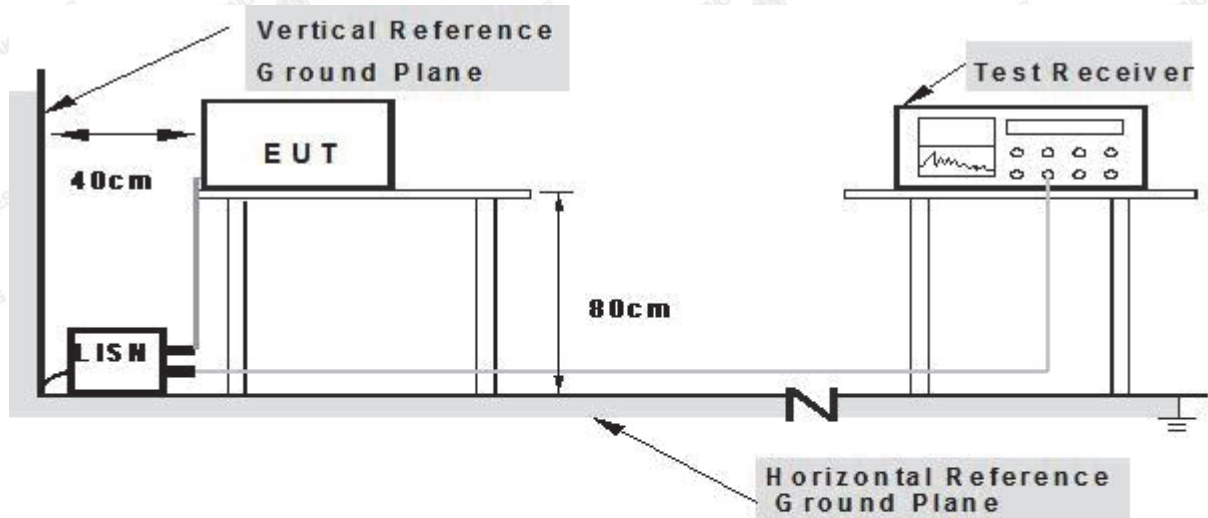

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.1.5 TEST RESULTS

EUT :	ED-IPC2000	Model Name. :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC12V From Adapter		

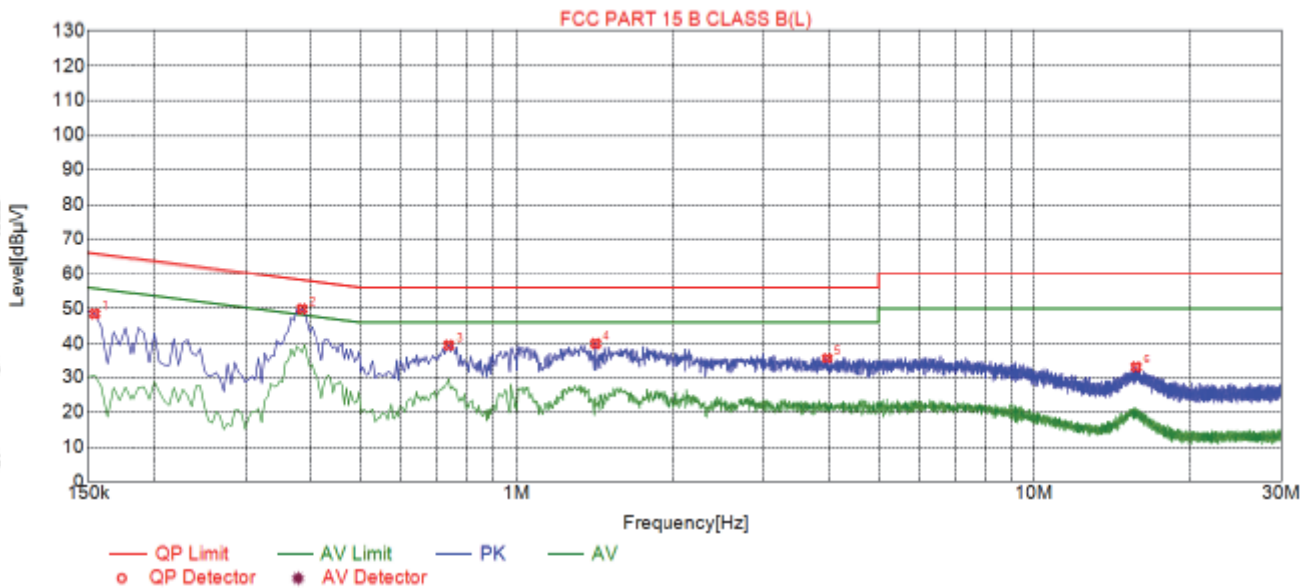

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1545	48.49	20.03	65.75	17.26	28.46	PK	L
2	0.3840	49.86	20.04	58.19	8.33	29.82	PK	L
3	0.7395	39.47	20.06	56.00	16.53	19.41	PK	L
4	1.4190	39.94	20.11	56.00	16.06	19.83	PK	L
5	3.9795	35.61	20.25	56.00	20.39	15.36	PK	L
6	15.7335	32.96	19.97	60.00	27.04	12.99	PK	L


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



EUT :	ED-IPC2000	Model Name. :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC12V From Adapter		

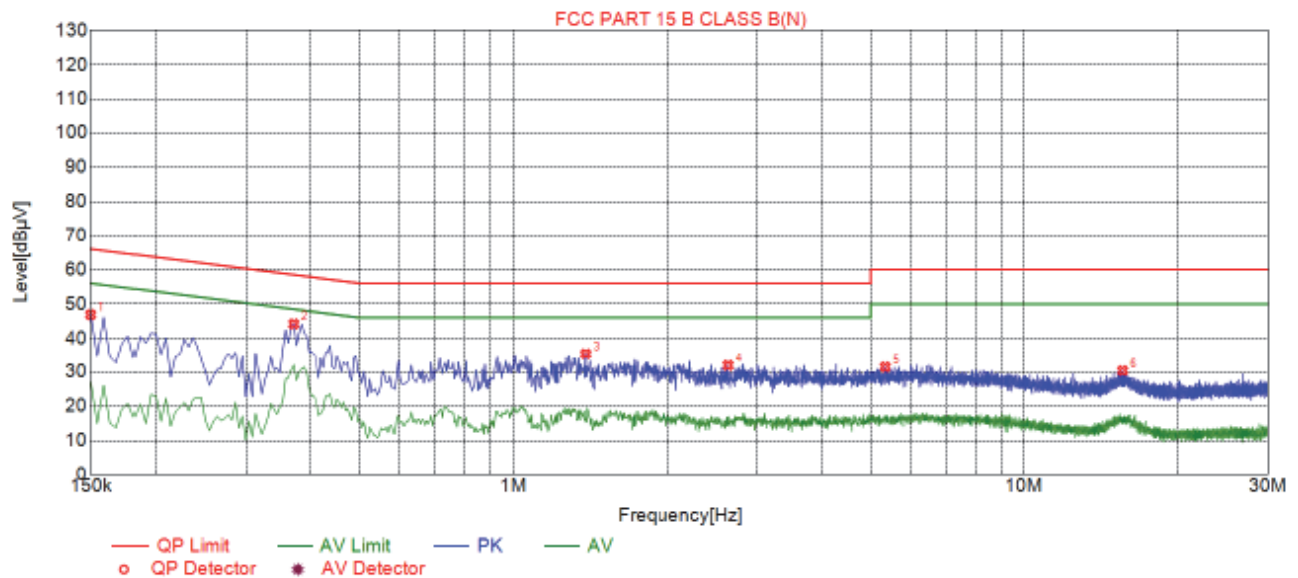

Suspected List

NO.	Freq. [MHz]	Level [dBμV]	Factor [dB]	Limit [dBμV]	Margin [dB]	Reading [dBμV]	Detector	Type
1	0.1500	46.90	20.03	66.00	19.10	26.87	PK	N
2	0.3705	44.18	20.05	58.49	14.31	24.13	PK	N
3	1.3830	35.41	20.11	56.00	20.59	15.30	PK	N
4	2.6340	31.96	20.21	56.00	24.04	11.75	PK	N
5	5.3385	31.46	20.26	60.00	28.54	11.20	PK	N
6	15.5895	30.37	19.97	60.00	29.63	10.40	PK	N

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).


3.2.2 TEST PROCEDURE

- a. The measuring distance of at 10 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.




3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

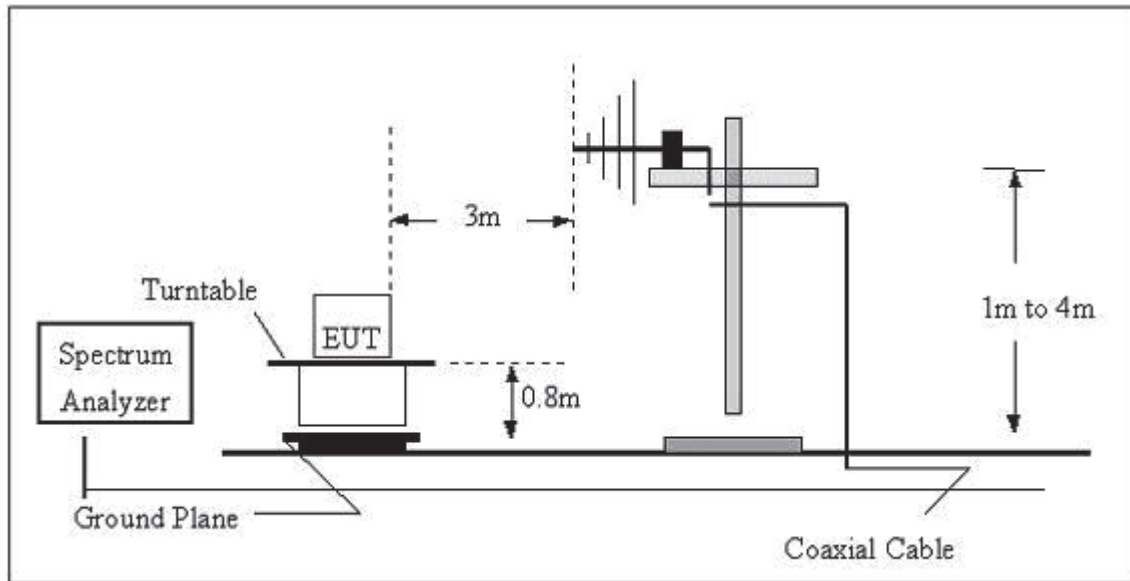

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

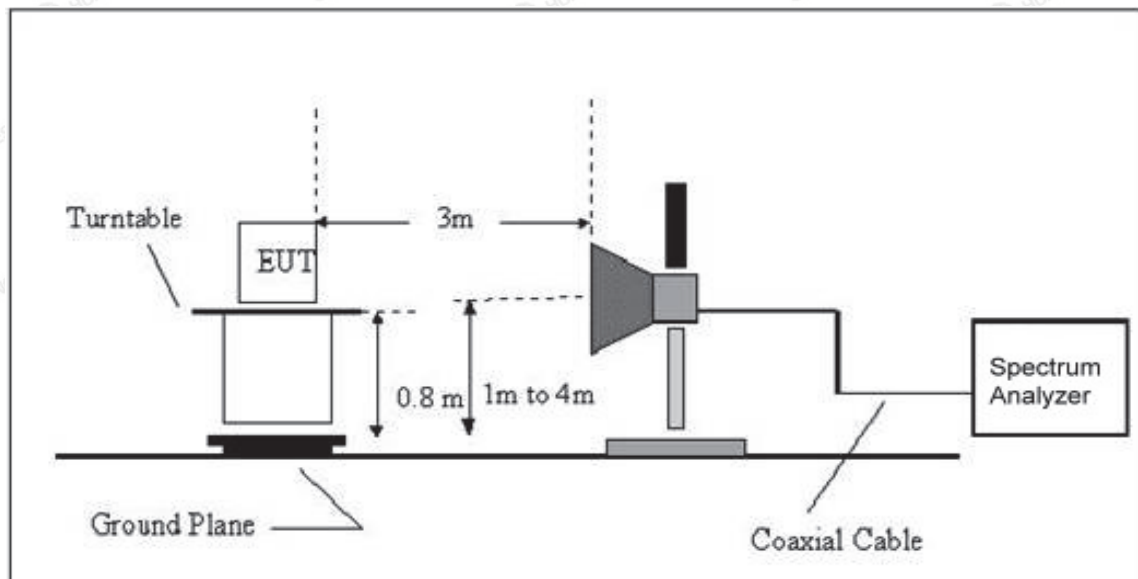


3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.



3.2.5 TEST RESULTS

EUT :	ED-IPC2000	Model Name :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC12V From Adapter		

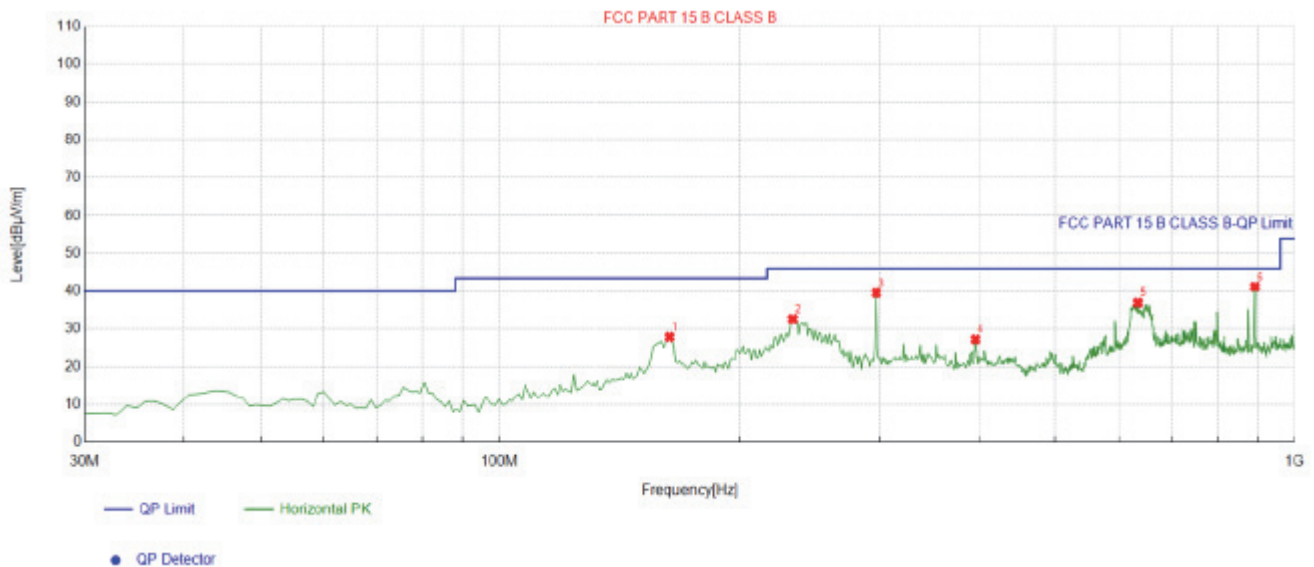

Suspected List


NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	163.02302	-17.19	45.10	27.91	43.50	15.59	100	188	Horizontal
2	232.93293	-13.66	46.31	32.65	46.00	13.35	100	151	Horizontal
3	297.01701	-12.04	51.58	39.54	46.00	6.46	100	203	Horizontal
4	396.05605	-9.73	36.96	27.23	46.00	18.77	100	52	Horizontal
5	634.91491	-4.36	41.32	36.96	46.00	9.04	100	49	Horizontal
6	891.25125	-0.67	41.90	41.23	46.00	4.77	100	248	Horizontal

Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



EUT :	ED-IPC2000	Model Name :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC12V From Adapter		

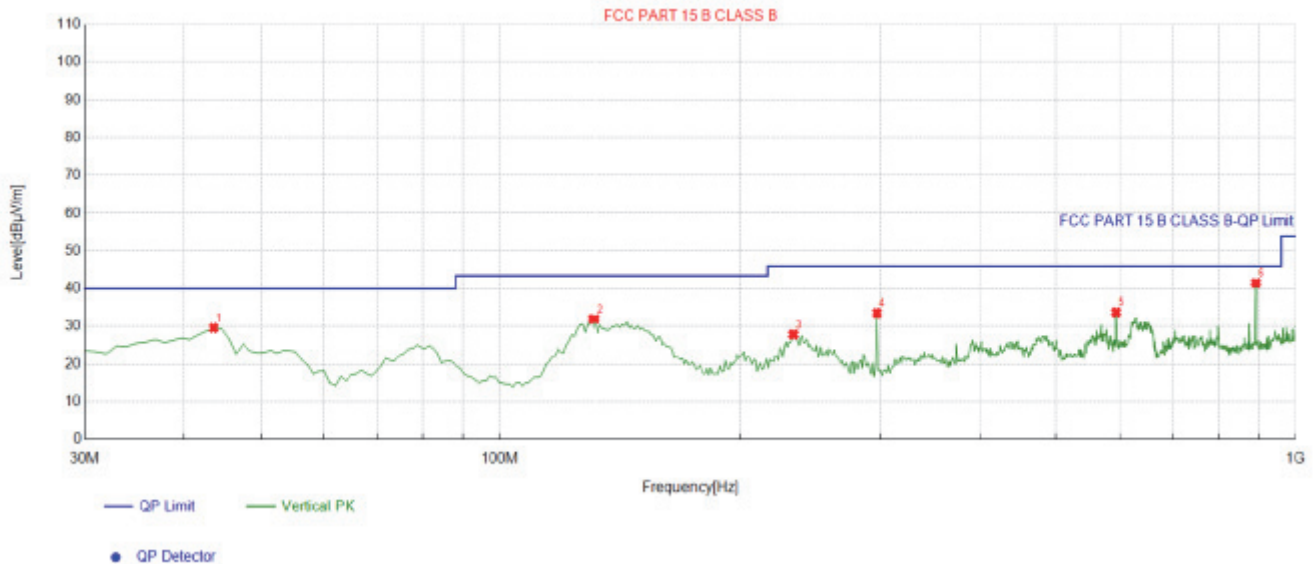

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.593594	-15.10	44.70	29.60	40.00	10.40	100	235	Vertical
2	130.98098	-17.34	49.32	31.98	43.50	11.52	100	110	Vertical
3	232.93293	-13.66	41.54	27.88	46.00	18.12	100	190	Vertical
4	297.01701	-12.04	45.65	33.61	46.00	12.39	100	193	Vertical
5	594.13413	-5.30	39.10	33.80	46.00	12.20	100	218	Vertical
6	891.25125	-0.67	42.17	41.50	46.00	4.50	100	80	Vertical


Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



3.2.6 TEST RESULTS(Above 1GHz)

EUT :	ED-IPC2000	Model Name :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC12V From Adapter		

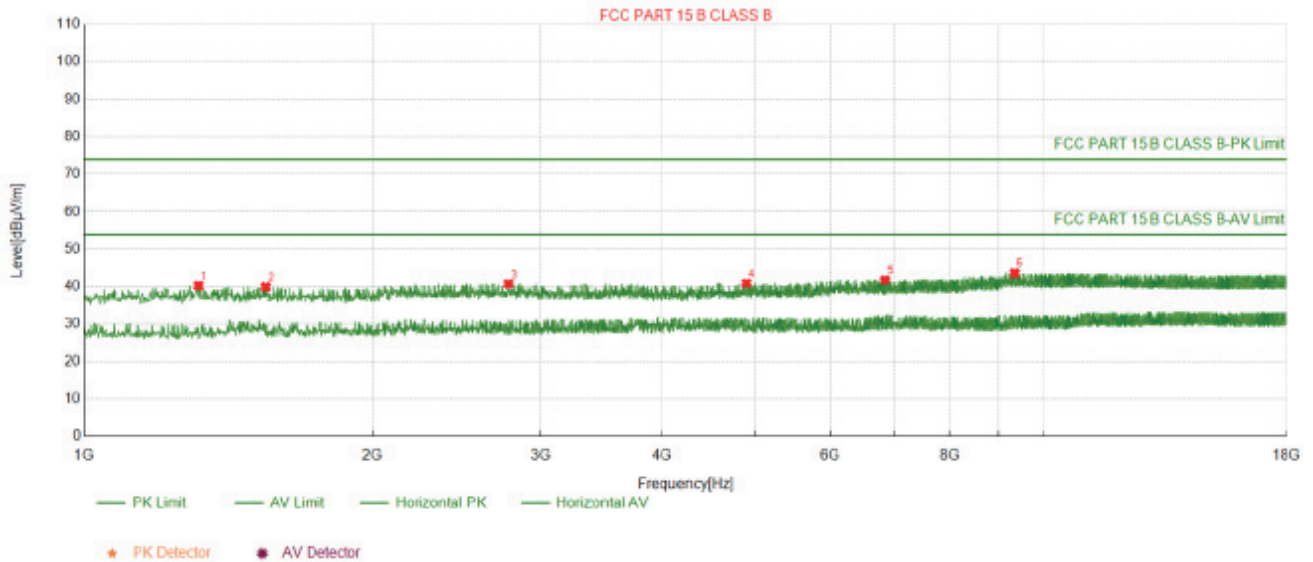


Suspected List									
NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1316.2316	-20.90	61.11	40.21	74.00	33.79	100	140	Horizontal
2	1547.4547	-20.47	60.32	39.85	74.00	34.15	100	260	Horizontal
3	2776.6776	-15.91	56.65	40.74	74.00	33.26	100	80	Horizontal
4	4903.5903	-9.52	50.44	40.92	74.00	33.08	100	230	Horizontal
5	6846.8846	-5.87	47.69	41.82	74.00	32.18	100	280	Horizontal
6	9359.7359	-1.79	45.47	43.68	74.00	30.32	100	10	Horizontal

Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;



EUT :	ED-IPC2000	Model Name :	ED-IPC2010
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2023-12-15
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC12V From Adapter		

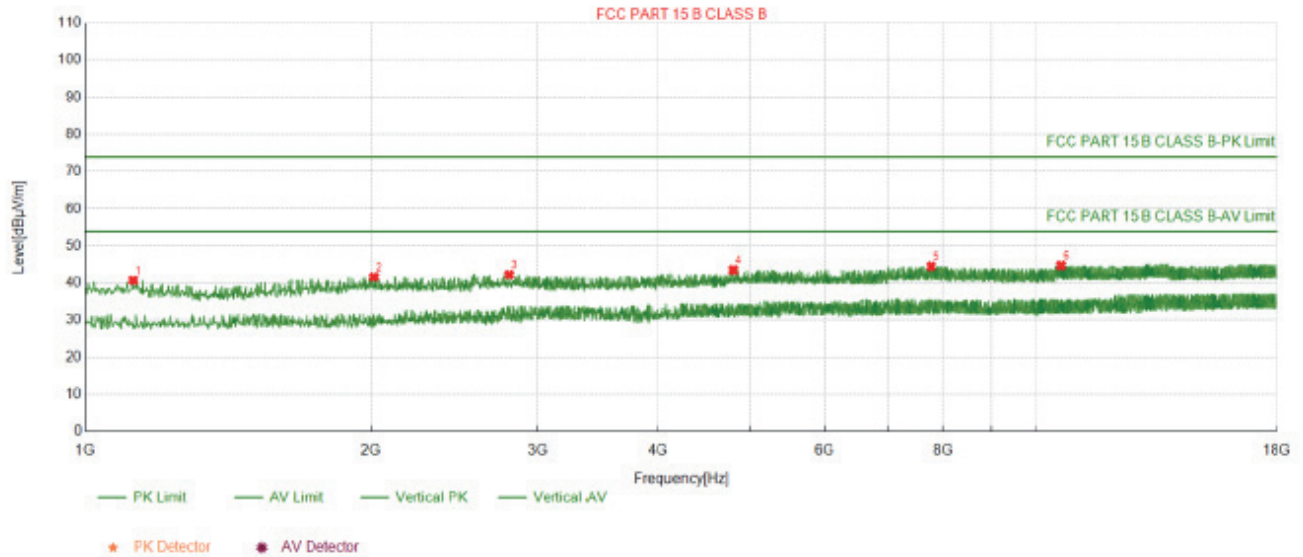

Suspected List

NO.	Freq. [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1122.4122	-21.65	62.41	40.76	74.00	33.24	100	100	Vertical
2	2015.0015	-18.66	60.32	41.66	74.00	32.34	100	210	Vertical
3	2798.7798	-15.89	58.16	42.27	74.00	31.73	100	230	Vertical
4	4808.3808	-9.71	53.31	43.60	74.00	30.40	100	130	Vertical
5	7771.7771	-3.69	48.25	44.56	74.00	29.44	100	170	Vertical
6	10650.165	0.39	44.39	44.78	74.00	29.22	100	280	Vertical


Final Data List

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level;




4. EUT TEST PHOTO

Conducted Emission

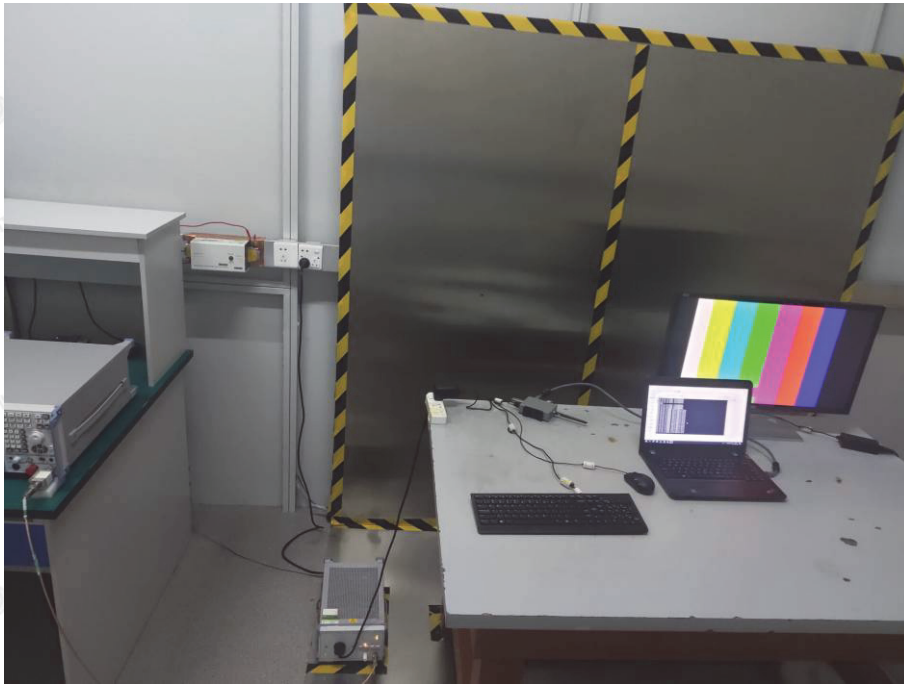

Radiated Emission

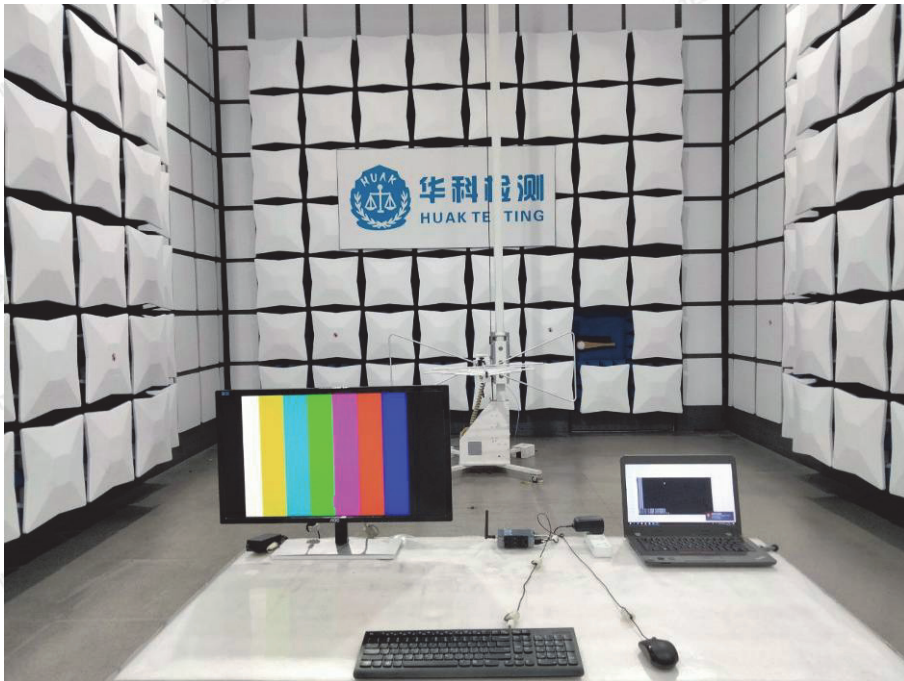



ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1

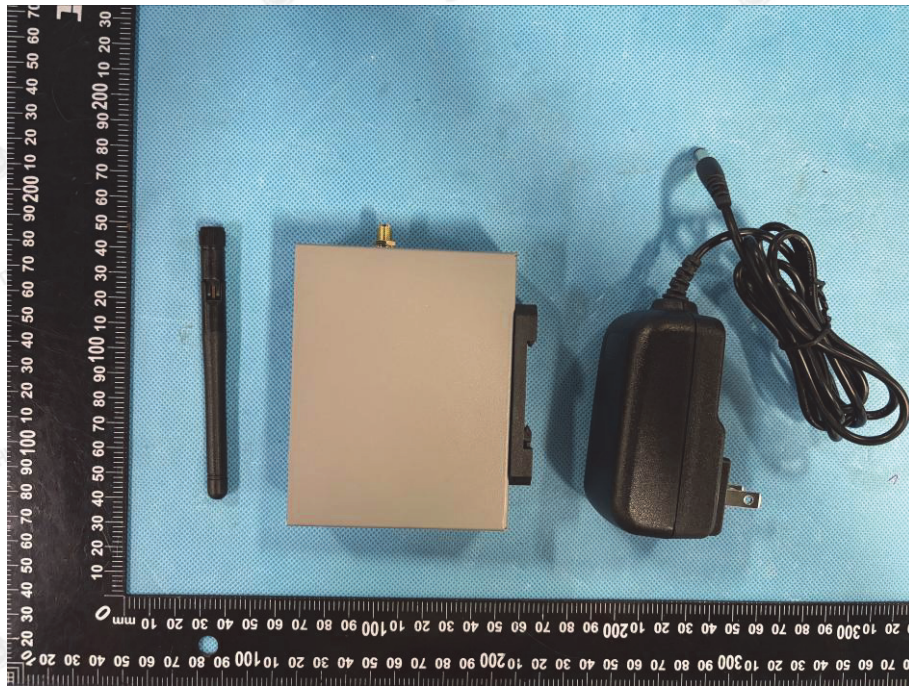


Photo 2

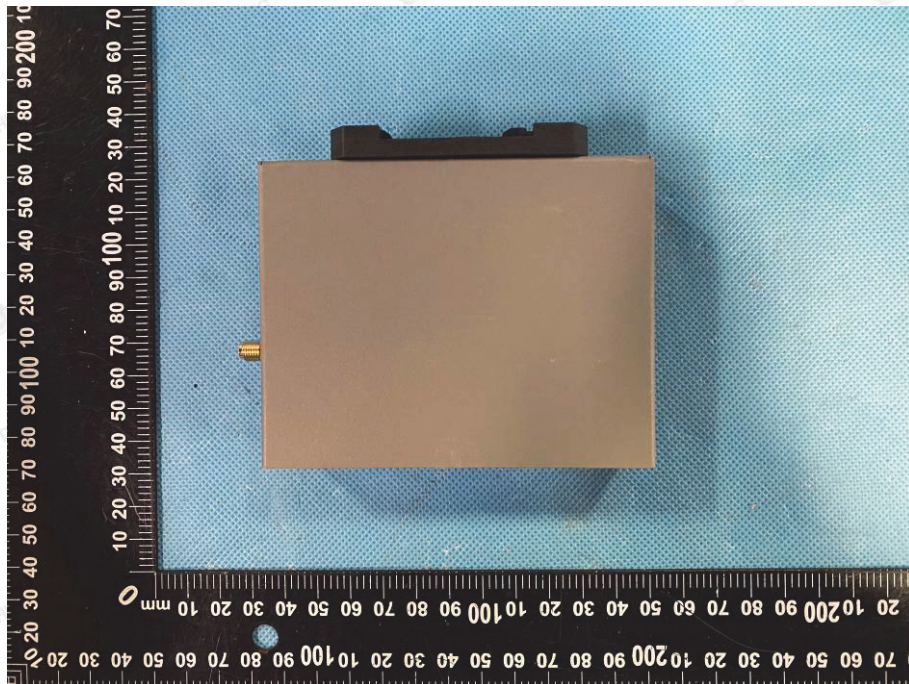




Photo 3



Photo 4





Photo 5

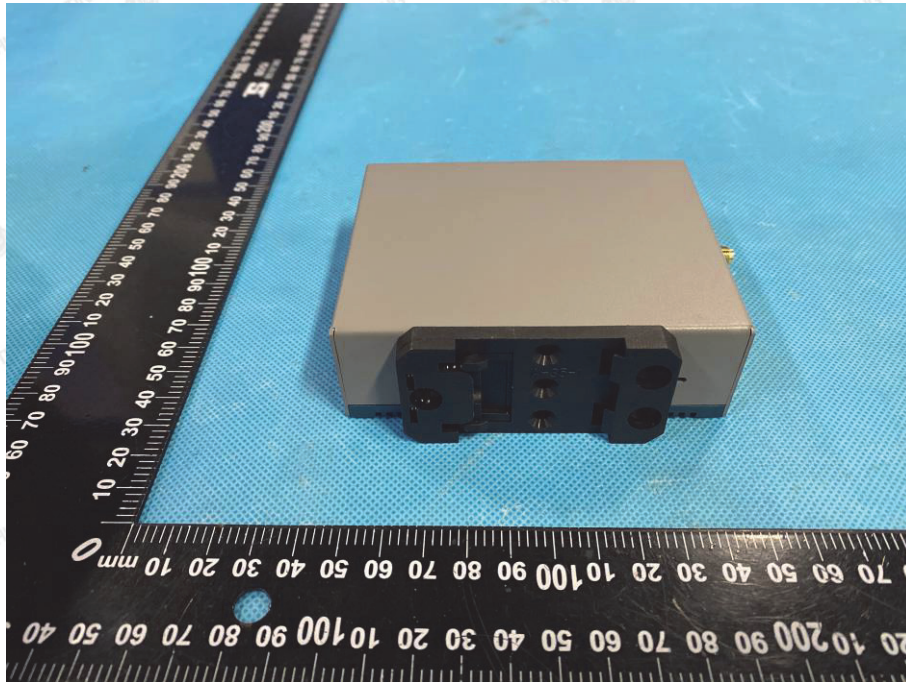


Photo 6





Photo 7

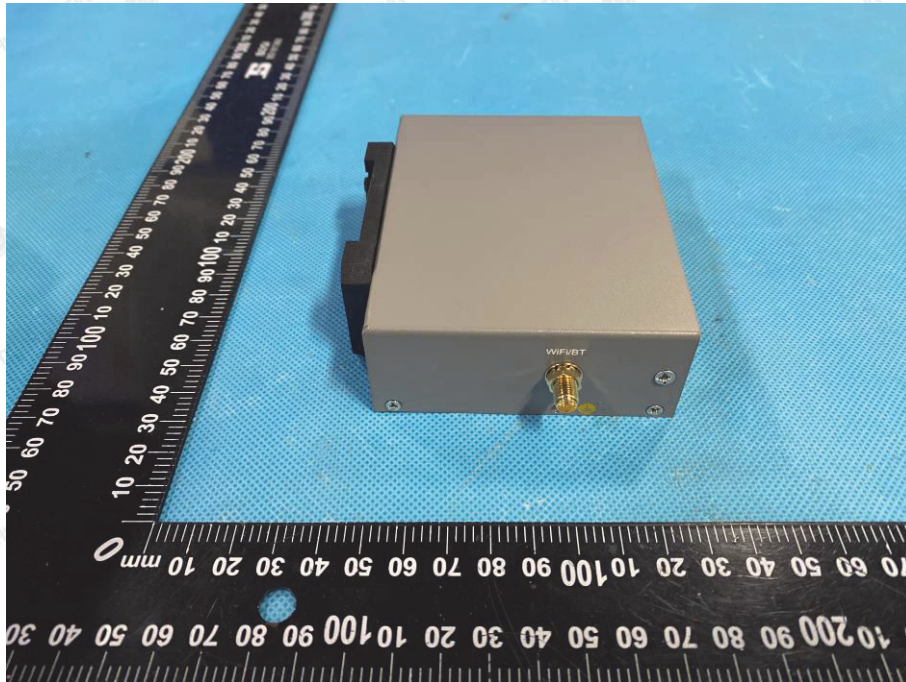


Photo 8

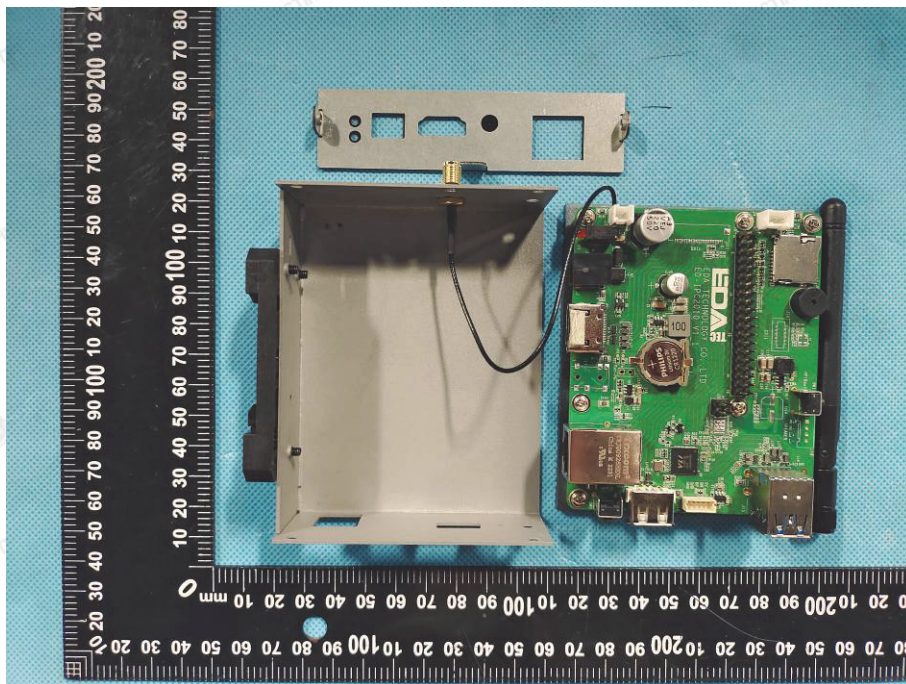




Photo 9

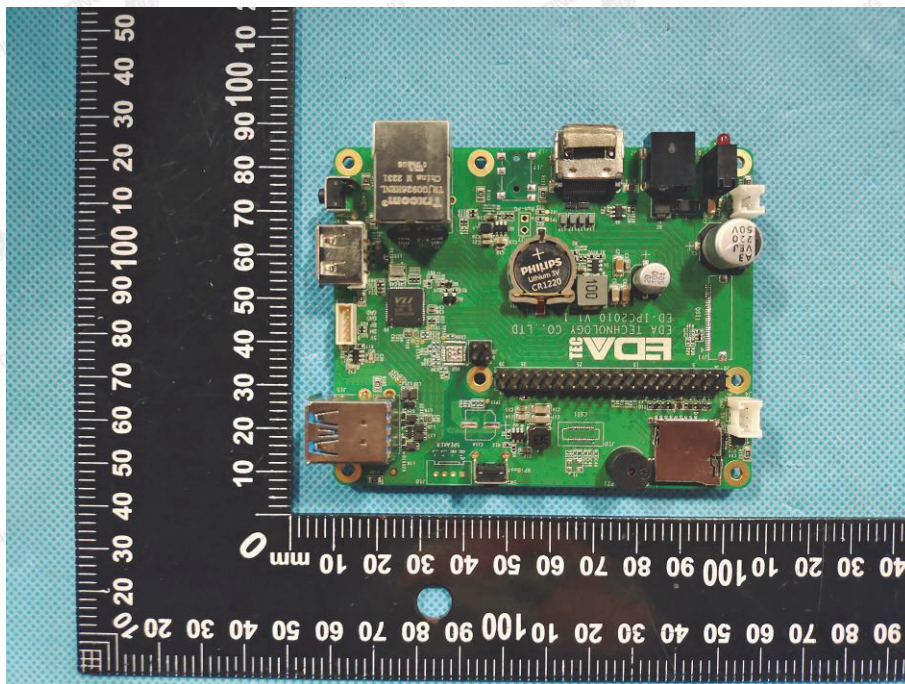


Photo 10

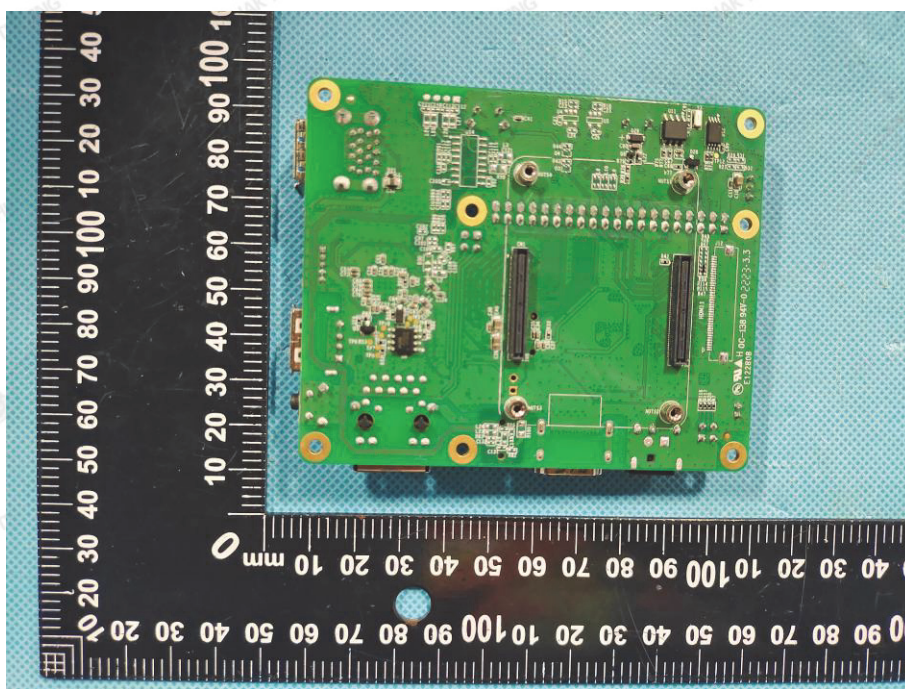




Photo 11


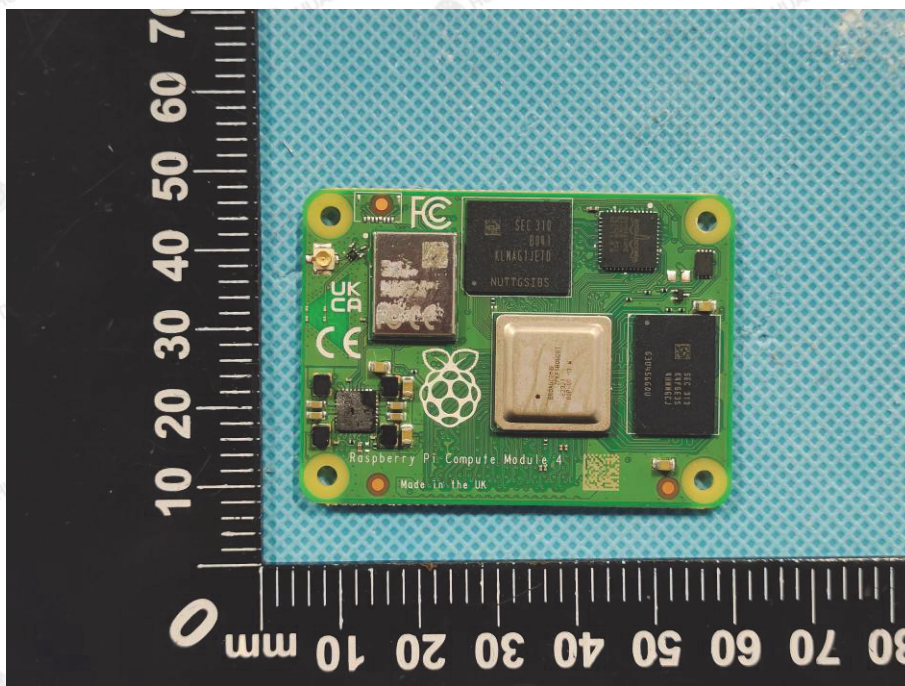


Photo 12

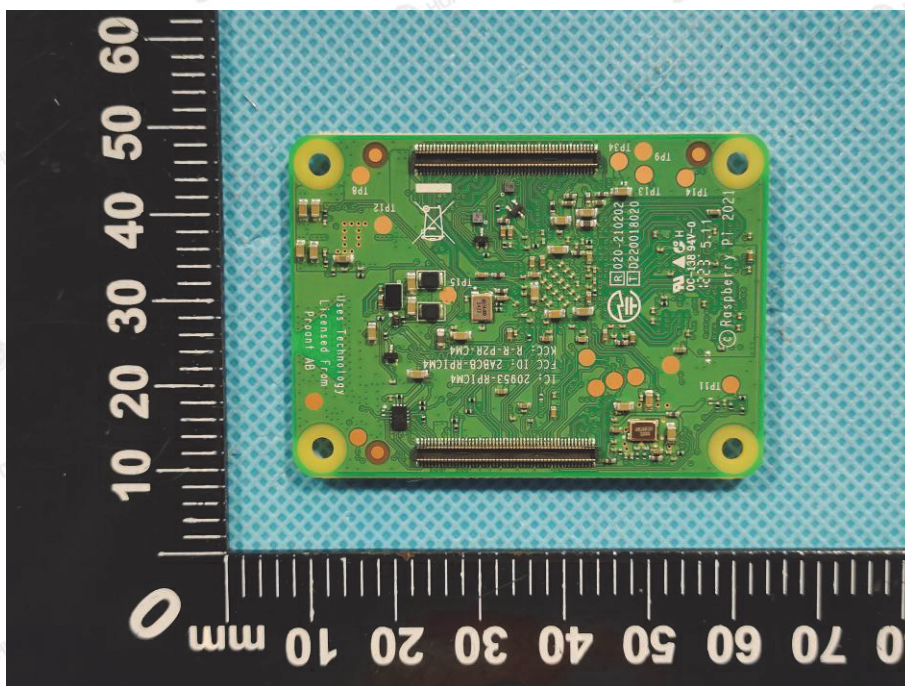

.....End of Report.....