

ED-BKT-1L2U

Datasheet

by EDA Technology Co., Ltd

built: 2026-03-02

ED-BKT-1L2U


Pole-mount Bracket for Outdoor Gateway ED-GWL2110



Specifications

| Basic Parameters | |
|---------------------------|---------------------|
| Material | Iron |
| Color | Silver |
| Thickness | 2.5mm |
| Surface Finish | Dacromet |
| Salt Spray Test | 200 hours |
| Application | Outdoor |
| Weight | About 40g |
| Dimensions (W x D x H) | 127mm x 76mm x 78mm |
| Installation | Pole-mount |
| Pole Inner Diameter Range | Ø25mm ~ Ø50mm |
| Load Capacity | 20Kg |

Dimensions

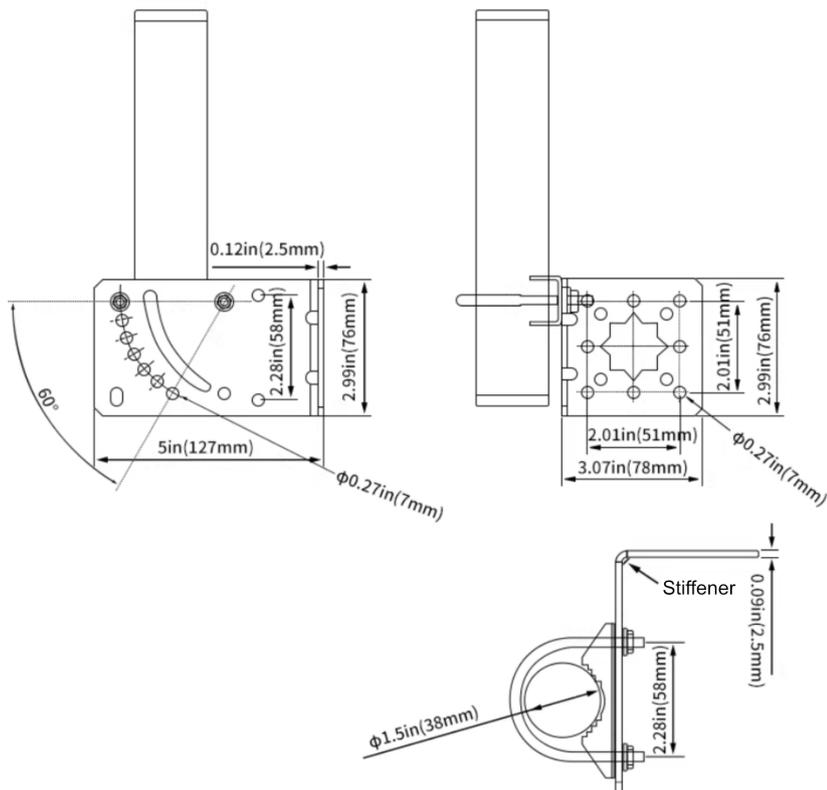

Ordering Code


| Model | Description |
|-------------|---|
| ED-BKT-1L2U | Pole-mount Bracket for Outdoor Gateway ED-GWL2110 |

Packing List

- 1 x ED-BKT-1L2U (Includes: 1 x L-Shaped Bracket, 2 x U-Shaped Brackets, 2 x Pipe Clamps, 4 x Flat Washers, 4 x M6 Nuts, 4 x Spring Washers, 4 x M6 Screws with Washers)

Installation

Parts List

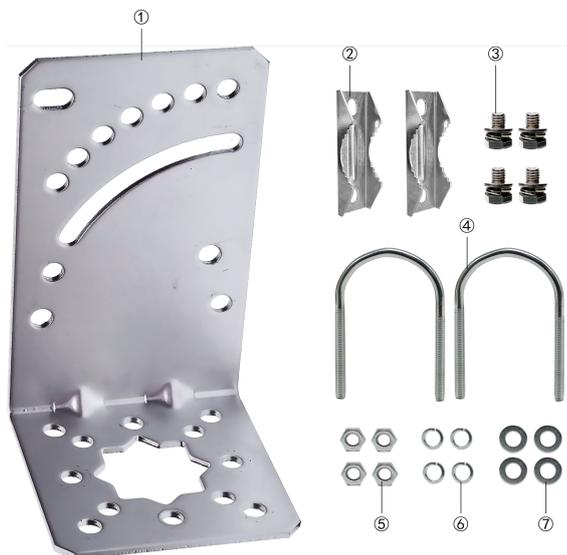

| NO. | Name | Quantity (PCS) |
|-----|---------------------------|----------------|
| ① | L-Shaped Bracket | 1 |
| ② | Pipe Clamp | 2 |
| ③ | M6 Screw with Washer | 4 |
| ④ | U-Shaped Bracket | 2 |
| ⑤ | M6 Nut | 4 |
| ⑥ | Spring Washer | 4 |
| ⑦ | Flat Washer | 4 |
| ⑧ | ED-GWL2110 (Not provided) | 1 |

Steps

1. Assemble 2 pipe clamps, 2 U-shaped brackets, 4 M6 nuts, 4 flat washers, and 4 spring washers onto the L-shaped bracket. The assembly should look like the image below.



TIP

The flat washers, spring washers, and M6 nuts are installed on the U-shaped brackets (on the backside of the L-shaped bracket, as shown in the image below). They are used to adjust and secure the pole.



- Align the mounting holes on the L-shaped bracket with the screw holes on the bottom of the ED-GWL2110 device. Insert four M6 screws with washers and tighten them clockwise using a Phillips screwdriver to secure the L-shaped bracket to the bottom of the ED-GWL2110.



- Adjust the M6 nuts on the backside of the L-shaped bracket according to the pole's diameter. Place the bracket onto the pole, then adjust the M6 nuts on the backside of the bracket to secure it firmly to the pole.

:: tip TIP Applicable only to grip poles with an inner diameter ranging from $\varnothing 25\text{mm}$ to $\varnothing 50\text{mm}$. :::



