

# ED-Pi5PCOOLER Cooling Performance Testing

---

## 1 Overview


---

This chapter introduces the Test device, Test purpose, Required Test Peripherals, and Test Program.

### 1.1 Product Overview

---

ED-Pi5PCOOLER is a passive cooler for Raspberry Pi 5, which provides excellent cooling performance for Raspberry Pi 5.

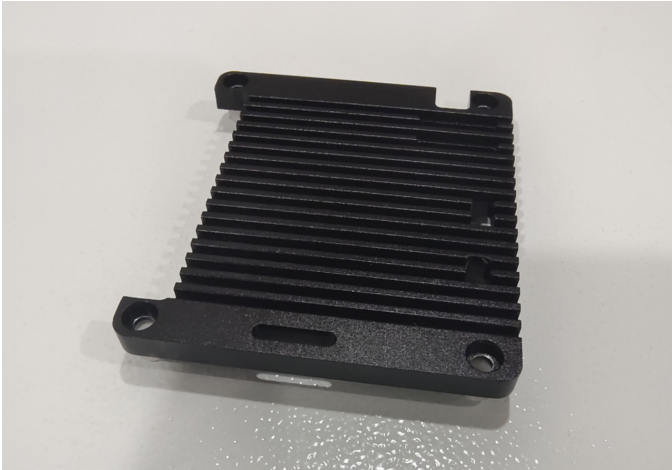

### 1.2 Test Purpose

---

Test the cooling performance of ED-Pi5PCOOLER.

### 1.3 Test Overview

---

By reading the temperature and frequency of Raspberry Pi 5 CPU, the cooling performance of ED-Pi5PCOOLER can be judged.

At the same ambient temperature, the lower temperature of Raspberry Pi 5 CPU and the higher the frequency indicates the better cooling performance.

Test Content	Data Source
Cooling test of ED-Pi5PCOOLER on Raspberry Pi 5	The temperature of Raspberry Pi 5 CPU

# 2 Cooling Performance Testing


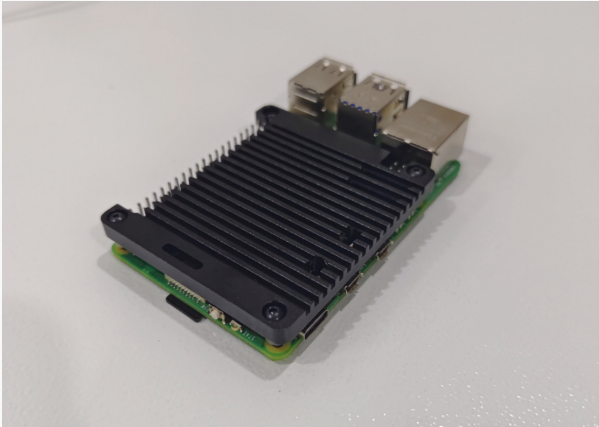
---

## 2.1 Device Under Test

---

### 2.1.1 Hardware Configuration

The following two groups of equipment were configured to test and compare the cooling effect of ED-Pi5PCOOLER.

Group	Configuration	
A	Raspberry Pi 5	
B	Raspberry Pi 5 + <b><u>ED-Pi5PCOOLER</u></b>	

### 2.1.2 Software Configuration

Operation System: 2024-07-04-raspios-bookworm-arm64.img

## 2.2 Test Equipment and Environment

---


## 2.2.1 Test Equipment

Test Equipment	Quantity
Raspberry Pi 5 8GB	2
Raspberry Pi 27W USB-C Power Supply	2
ED-Pi5PCOOLER	1
Thermostat	1
Network Cable	2

## 2.2.2 Test Environment

Temperature: Constant temperature (25°C)

Humidity: 20%

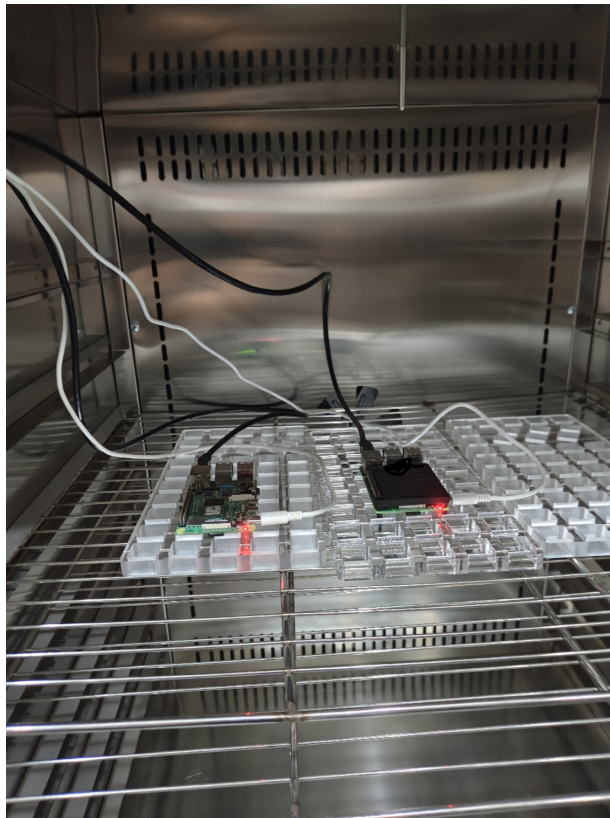

## 2.2.3 Test Software

This script is used to make the Raspberry Pi 5 CPU 4 core run at full load, record the temperature data of Raspberry Pi 5 CPU every 5s, save it in a ".csv" file and print it to the terminal.

```
#!/bin/bash
#
PID_BENCH=
FILE=./temp$1-bench.csv
```

```

[ "$(whoami)" == "root" ] || { echo "Must be run as sudo!"; exit 1; }

if [ ! `which sysbench` ]; then
    apt-get update -y
    apt-get install -y sysbench
fi

trap ctrl_c INT

ctrl_c() {
    echo "*** CTRL-C Detected"
    echo "*** Kill Bench and Exit"
    kill $PID_BENCH >/dev/null 2>&1
    exit 0
}

bench() {
    while true ; do
        sysbench --test=cpu --cpu-max-prime=20000 --num-threads=4 run > /dev/null
2>&1
        # sleep 1
    done
}

monitor() {
    Counter=14
    DisplayHeader="Time      Temp      CPU      Throttle      Vcore"
    echo "Time,      Temp,      CPU,      Throttle,      Vcore" >> ${FILE}
    while true ; do
        let ++Counter
        if [ ${Counter} -eq 15 ]; then
            echo -e "${DisplayHeader}"
            Counter=0
        fi
        Health=$(perl -e "printf \"%19b\n\", $(vcgencmd get_throttled | cut -f2 -
d=)")
        Temp=$(vcgencmd measure_temp | cut -f2 -d=)
        Clockspeed=$(vcgencmd measure_clock arm | awk -F"=" '{printf
("%0.0f", $2/1000000); }' )
        CoreVolt=$(vcgencmd measure_volts | cut -f2 -d= | sed 's/000//')
        echo -e "$(date '+%H:%M:%S'), ${Temp}, $(printf '%4s' ${Clockspeed})MHz,
$(printf '%020u' ${Health}), ${CoreVolt}" | tee -a ${FILE}
        sleep 5
    done
}

echo "***** Raspberry Pi Benchmark *****"
echo ""
echo "          Press 'CTRL + C' to Exit          "
echo ""
echo "*****"
echo ""

touch ${FILE}

```


```
bench &  
PID_BENCH=$!
```

```
monitor
```

## 2.3 Test Steps

1. Flashing the **2024-07-04-raspios-bookworm-arm64.img** image to two groups of devices, connect them with ssh, and update them using the following commands in turn `sudo apt update` and `sudo apt upgrade` commands.
2. Assign configurations A and B for simultaneous testing of two groups of devices for one hour.
3. Run the script in the test software to set the Raspberry Pi 5 CPU to run at full load with 4 cores and read the CPU temperature and frequency data.
4. Evaluate the cooling effect of ED-Pi5PCOOLER by comparing the temperature and frequency data of the Raspberry Pi 5 CPU of the two groups of devices; the lower the temperature of the Raspberry Pi 5 CPU and the higher the frequency of the device when it is running stably under the same ambient temperature, the better cooling effect will be.

## 2.4 Test Result and Analysis

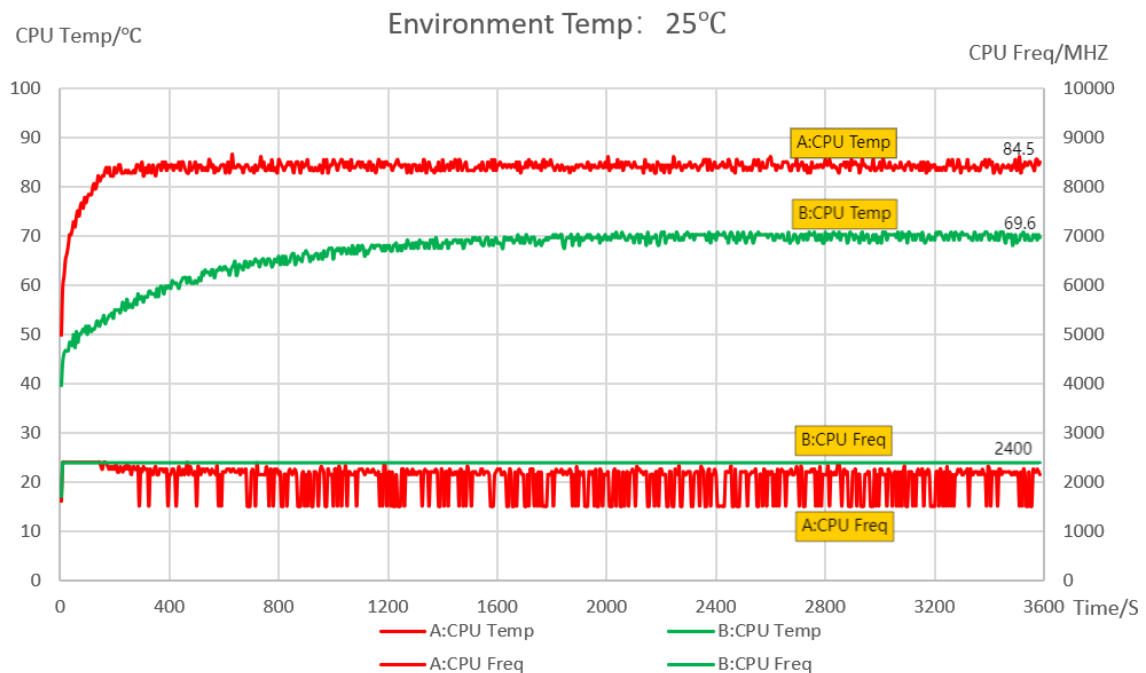

1. The following table shows the average temperature of the Raspberry Pi 5 CPU during stable operation of the two groups of devices

Group	Configuration	Stable running temperature of CPU (°C)
A	Raspberry Pi 5	84.5
B	Raspberry Pi 5 + <b>ED-Pi5PCOOLER</b>	69.6

2. When the device is running at a steady state in a 25°C environment, the **ED-PI5PCOOLER** can reduce the temperature of the Raspberry Pi 5 CPU by approximately 15°C, allowing the Raspberry Pi 5 CPU to run continuously at its maximum mains frequency (2400MHZ).